

Fast, contactless convenience  
for better pickup experiences





## Associates quickly load orders from back to open compartments

- » Streamlined workflow increases productivity and throughput
- » Simple associate interface with QR/barcode reader and touchscreen
- » Color-coded compartment lights show associates where to load orders
- » Easy-clean, removable compartment floor panels



## Customers pick up at front in seconds

- » Familiar user interface (UI) with QR/barcode reader and touchscreen
- » Interior and exterior indicator lights guide customer to order(s)
- » Door opens automatically when customer scans or enters order code

## NEW! Space-saving front-load model

- » Designed for smaller footprint with no rear access
- » Orders are loaded and picked up at front
- » Diverts off-premise traffic away from your lobby
- » Optimizes productivity and labor efficiency



# Faster for them, smarter for you

### Offer fast, self-serve pickup

Keep customers coming back with skip-the-line convenience and pickup in seconds.

### Flexible integration option

An array of APIs makes integration with your existing KDS/POS systems fast and easy.


### The right size and configuration for your operation

Modular construction offers dozens of options and lets you easily add additional units.

# CREATE THE IDEAL SYSTEM FOR YOUR ORDER VOLUME AND VELOCITY

## 1 CHOOSE 1 CONTROLLER & ADD UP TO 3 SATELLITES

Add additional Controller Lockers as needed.

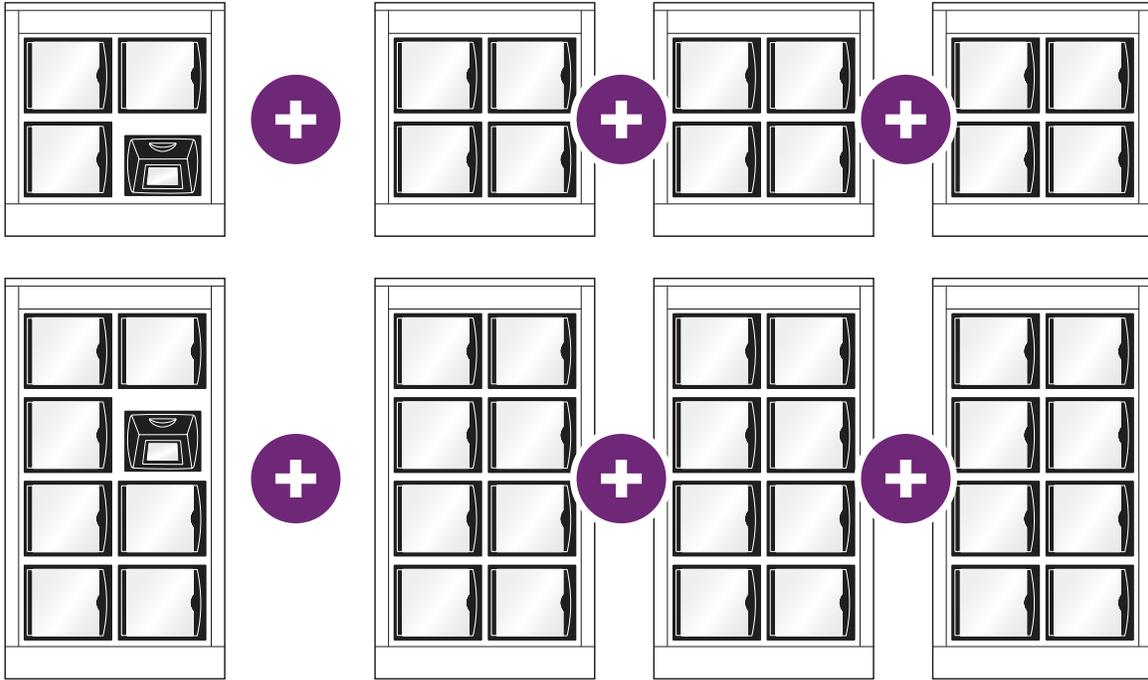


Controllers with UI

Satellites

## 2 CHOOSE LOCKER COLOR


Standard door color is black.

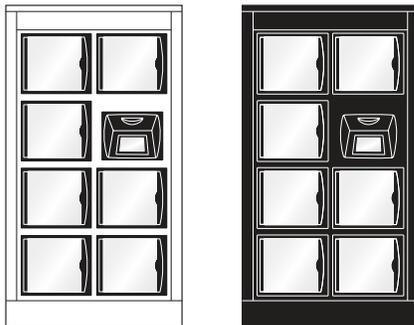

Standard White

Standard Black

## 3 CHOOSE OPTIONAL DOOR COLORS & BRANDING\*

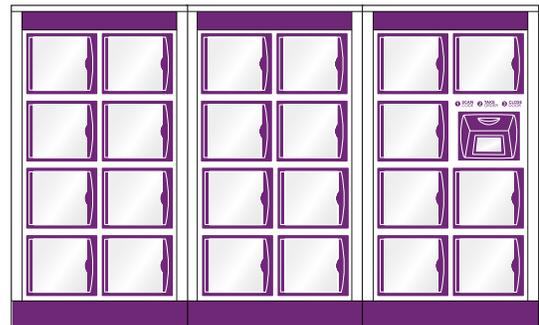


\*Optional custom door colors and branding available for additional cost, minimum quantities may apply.



### Real-time visibility and control

See real-time order and compartment data, and dive into trends like order pickups and dwell time, compartment availability and more.

# FLOW-THRU (FT) & FRONT-LOAD (FL) LOCKER SPECIFICATIONS

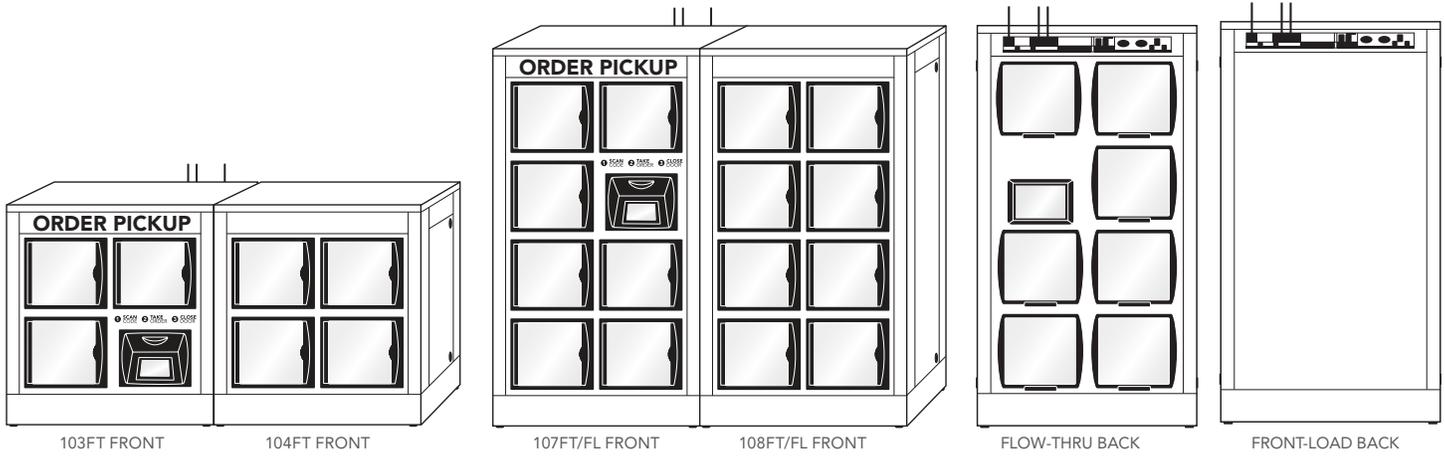

103/104 Flow-Thru Controller/Satellite Lockers (Countertop Model)					
Overall Dimensions <sup>1</sup> (W x H x D)	Depth w/Door Open <sup>2</sup> From Back to Edge of Open Door	Overall Weight Approximate	Shipping Dimensions (W x H x D)	Shipping Weight Approximate	Electrical <sup>3</sup>
40" x 41.4" – 42.9" x 22.5" 1016 mm x 1049 – 1087 mm x 570 mm	37" 939 mm	440 lbs. 200 kg	53" x 82" x 31" 1346 mm x 2083 mm x 788 mm	480 lbs. 220 kg	100VAC/50Hz/4A 240VAC/60Hz/4A

107/108 Flow-Thru/Front-Load Controller/Satellite Lockers (Floor Model)					
Overall Dimensions <sup>1</sup> (W x H x D)	Depth w/Door Open <sup>2</sup> From Back to Edge of Open Door	Overall Weight Approximate	Shipping Dimensions (W x H x D)	Shipping Weight Approximate	Electrical <sup>3</sup>
40" x 76.4" – 77.9" x 22.5" 1016 mm x 1939 – 1978 mm x 570 mm	37" 939 mm	440 lbs. 200 kg	53" x 82" x 31" 1346 mm x 2083 mm x 788 mm	480 lbs. 220 kg	100VAC/50Hz/4A 240VAC/60Hz/4A

1 Overall Height varies due to adjustability of leveling feet – may add up to 1.5"/38.1 mm and does not include antennae which extends 3.4"/86.36 mm from top of Controller only. Overall Depth listed is for 103/107FT ONLY and is from front of door to back of UI; 104/108FT is 20.1"/511 mm and measures from front of door to end of spout; 107/108FL are 18.8"/479 mm and measure from front of door to back of device.

2 Depth with Door Open when measured from the front of ALL devices to edge of door is 15.4"/391 mm. Overall Depth with Door Open varies by make and model.

3 Can operate 1 Controller and up to 3 Satellite devices on a single power supply.

User Interface	
<b>Front Touchscreen</b>	<b>Active Area</b>
7-Inch Capacitive Touch 800 x 480 Resolution	6.06" x 3.37" 153.84 mm x 85.63 mm
<b>Back Touchscreen</b>	<b>Active Area</b>
10-Inch Capacitive Touch 1280 x 800 Resolution	8.58" x 5.38" 217.96 mm x 136.60 mm
Scanner: 1-D & 2-D Barcode or QR Code	

Doors & Compartments		
<b>Door Dimensions</b> (W x H)	<b>Interior Dimensions</b> (W x H x D)	<b>Capacity</b> Maximum
12.9" x 11.9" 328.5 mm x 303 mm	13.3" x 11.3" x 16.25" 338.9 mm x 287 mm x 412.8 mm	15 lbs. 6.8 kg
<b>Door Locking Mechanism:</b> Solenoid door latch with integrated latch sensor		

Merco and Apex reserve the right to change specifications appearing in this bulletin without incurring any obligation for equipment previously or subsequently sold.



[www.MercoProducts.com](http://www.MercoProducts.com)



[www.ApexOrderPickup.com](http://www.ApexOrderPickup.com)

TEAMING UP FOR SMARTER FOODSERVICE SOLUTIONS